XYLOS®
Touch Wood Touch Xylos

THE FLOORING COLLECTION



LUXURY VINLY TILE
SERIES

Timeless. Durable. Refined.

TECHNICAL DETAILS

	DETAILS	STANDARD	1.5 MM	2.0 MM	3.0 MM	5.0 MM
CERTIFICATION	TYPE OF FLOOR COVERING	ISO 10582	LUXURY VINYL TILE	LUXURY VINYL TILE	LUXURY VINYL TILE	LUXURY VINYL TILE
	CE CERTIFICATION	EN 14041	Yes	Yes	Yes	Yes
	CLASSIFICATION	EN ISO 10874	Commercial : 31	Commercial : 32	Commercial : 32	Commercial : 32
TECHNICAL CHARACTERISTICS	TOTAL THICKNESS	EN ISO 2436 (EN 428)	1.5 MM	2.0 MM	3.0 MM	5.0 MM
	WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.20 MM	0.30 MM	0.50 MM	0.30 MM / 0.50 MM
	SURFACE TREATMENT	UV TREATED	PUR	PUR	PUR	PUR
	TOTAL WEIGHT	EN ISO 23997 (EN 430)	3300 g/m2	3300 g/m2	3300 g/m2	3300 g/m2
	WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I	TYPE I	TYPE I	TYPE I
	FORM OF DELIVERY	EN ISO 24342 (EN 427) Planks box	60.00 Sq.ft / Box	46.65 Sq.ft / Box	32.65 Sq.ft / Box	23.33 Sq.ft / Box
TECHNICAL PERFORMANCES	DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	Pass	Pass	Pass	Pass
	REACTION TO FIRE	EN 13501 – 1	Bfl- S1 glued over A2fl sub- strate (concrete)	Bfl- S1 glued over A2fl substrate (concrete)	Bfl- S1 glued over A2fl substrate (concrete)	Bfl- S1 glued over A2fl substrate (concrete)
	RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	Pass	Pass	Pass	Pass
	FURNITURE LEG	EN 424	No Damage	No Damage	No Damage	No Damage
	CASTOR CHAIR	EN ISO 4918 (EN 425)	No Damage	No Damage	No Damage	No Damage
	CURL RESULTANT TO HEAT	EN ISO 23999 (434)	Pass	Pass	Pass	Pass
	THERMAL RESISTANCE	EN ISO 10456	0.07 M2 K/W	0.07 M2 K/W	0.07 M2 K/W	0.07 M2 K/W
	LIGHT FASTNESS	EN ISO 105 – B02	>Grade 6 | Pass	>Grade 6 | Pass	>Grade 6 | Pass	>Grade 6 | Pass
	RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	Good Resistance | Pass	Good Resistance | Pass	Good Resistance | Pass	Good Resistance | Pass
	SLIP RESISTANCE	DIN51130 | EN 13893	R9 | Class DS	R9 | Class DS	R9 | Class DS	R9 | Class DS
	ELECTRICAL PROPERTIES	EN 1815 | EN 1081	< 2 kV on concrete | R1 > 1010 Ω	< 2 kV on concrete | R1 > 1010 Ω	< 2 kV on concrete | R1 > 1010 Ω	< 2 kV on concrete | R1 > 1010 Ω

Key Benefits of LVT Flooring

Water Resistance -- Completely waterproof or highly water-resistant options make it ideal for moisture-prone areas like kitchens, bathrooms, and

High Durability -- A tough wear layer resists scratches, dents, scuffs, and heavy foot traffic, making it a great choice for families and pets

Easy Mainteniance -- Requires only basic sweeping, vacuuming, and occasion mopping with no need for specialized waxing, sealing, or oiling.

Simple Installation -- Available in click-lock floating systems or glue-down planks that can often be laid directly over slightly uneven sub-floors

GLUEDOWN INSTALLATION



LVTST - 1.501

Thickness - 1.5mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 1.502

Thickness - 1.5mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65



LVTST - 1.503

Thickness - 1.5mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 1.504

Thickness - 1.5mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 1.505

Thickness - 1.5mm
Plank Size - 7”x 48”
Sqft Per Box - 46.65





LVTST - 1.506

Thickness - 1.5mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 1.507

Thickness - 1.5mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65



LVTST - 1.508

Thickness - 1.5mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 1.509

Thickness - 1.5mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 2.001

Thickness - 2.0mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 2.002

Thickness - 2.0mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 2.003

Thickness - 2.0mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 2.004

Thickness - 2.0mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 2.005

Thickness - 2.0mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65



LVTST - 2.006

Thickness - 2.0mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65



LVTST - 2.007

Thickness - 2.0mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 2.008

Thickness - 2.0mm

Plank Size - 7”x 48”

Sqft Per Box - 46.65





LVTST - 2.009

Thickness - 2.0mm

Plank Size - 24”x 24”

Sqft Per Box - 64





LVTST - 2.010

Thickness - 2.0mm

Plank Size - 24”x 24”

Sqft Per Box - 64







LVTHB - 2.011

HERRINGBONE PATTERN

Thickness - 2.0mm

Plank Size - 6”x 36”

Sqft Per Box - 30





LVTHB - 2.012

HERRINGBONE PATTERN


Thickness - 2.0mm

Plank Size - 6”x 36”

Sqft Per Box - 30





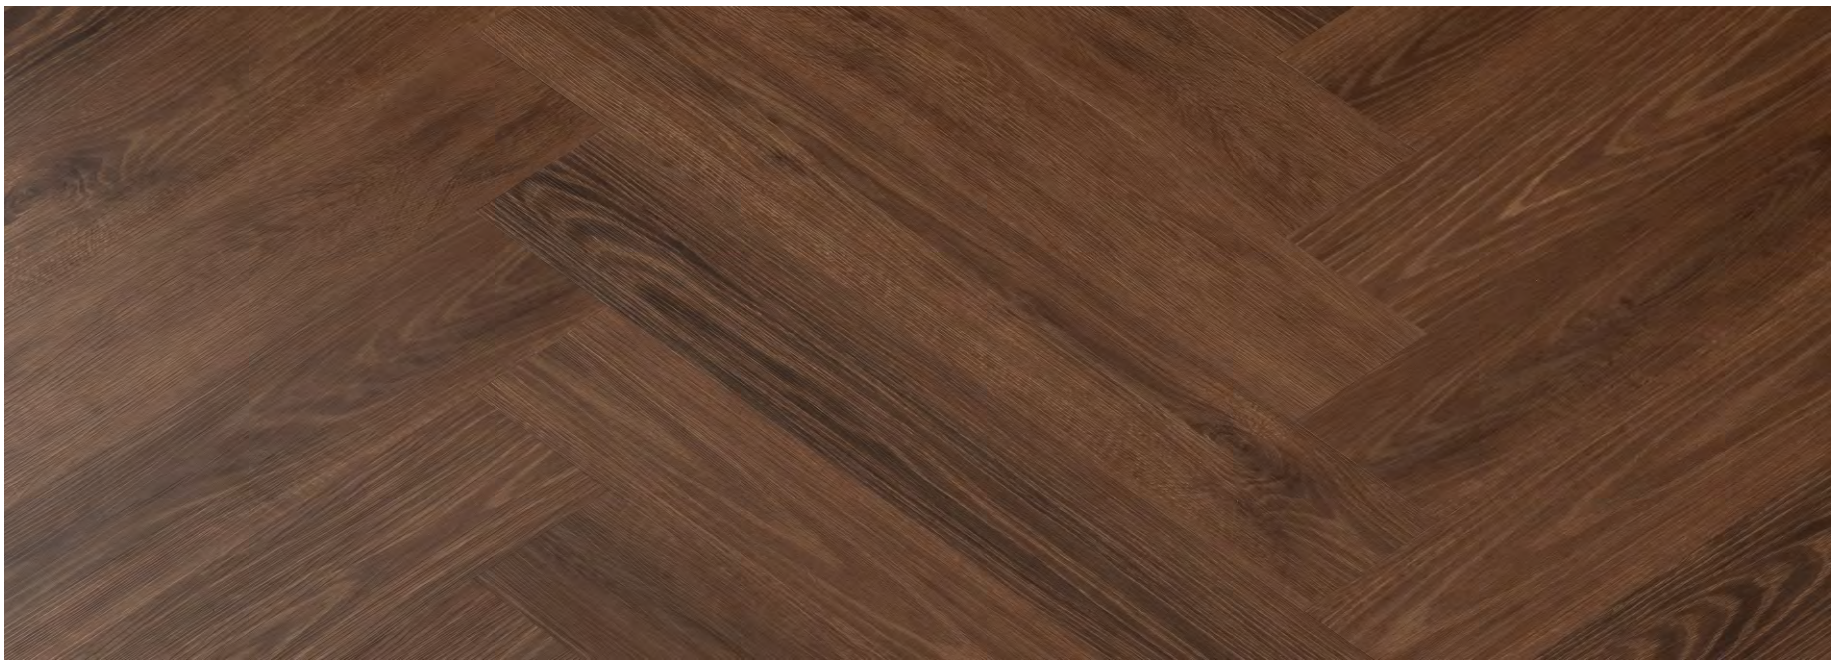

LVTHB - 2.013

HERRINGBONE PATTERN

Thickness - 2.0mm

Plank Size - 6”x 36”

Sqft Per Box - 30





LVTST - 3.001

Thickness - 3.0mm
Plank Size - 7”x 48”
Sqft Per Box - 32.65





LVTST - 3.002

Thickness - 3.0mm

Plank Size - 7”x 48”

Sqft Per Box - 32.65





LVTST - 3.003

Thickness - 3.0mm

Plank Size - 7”x 48”

Sqft Per Box - 32.65





LVTST - 3.004

Thickness - 3.0mm
Plank Size - 7”x 48”
Sqft Per Box - 32.65





LVTST - 3.005

Thickness - 3.0mm
Plank Size - 7”x 48”
Sqft Per Box - 32.65



XYLOS®
Touch Wood Touch Xylos

G - 1 & 2, Suyog Industrial Estate,
Near Home Town, LBS Marg,
Vikhroli (West), Mumbai - 400083
Phone no. - +91 (0) 22 25775558/9
www.xylosindia.in

Samling Global Limited

Corporate Office,
Lot 191 Block 1, Kuala Baram Industrial Estate,
CDT 148,98009 Miri, Sarawak, Malaysia
www.samling.com